


## Carpenter Street Improvements

### Village of Downers Grove

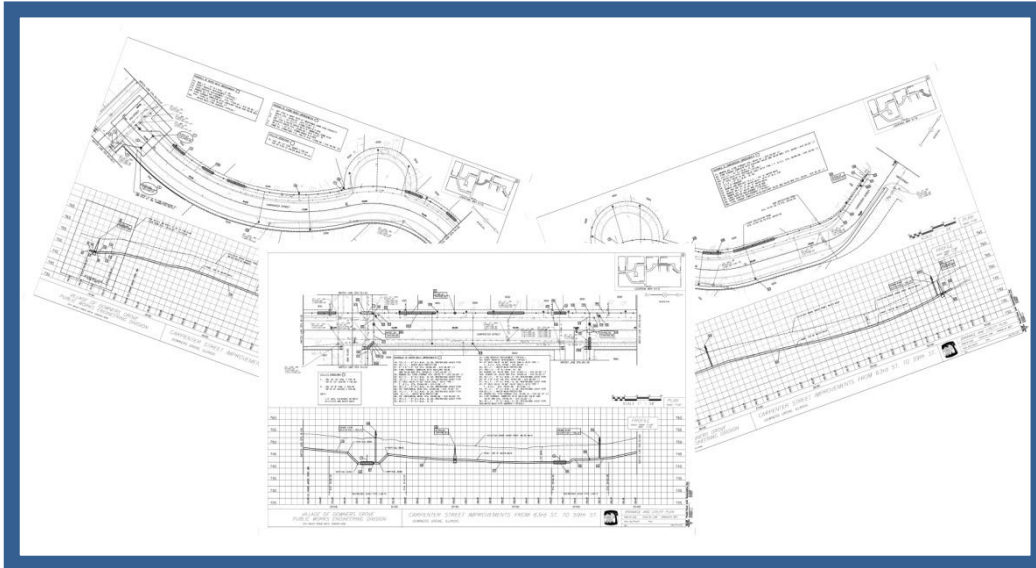

Postl-Yore and Associates provided surveying, design engineering, and bidding support on the Carpenter Street Improvement Project for the Village of Downers Grove. This project encompassed designing approx. 2,500 L.F. of 8" water main which included cutting, capping, and abandoning the existing 6" water main, transferring water services and directional boring under all trees to assure no damage was done to the existing trees. In addition to water main the project also included approx. 5,800 L.F. of pavement removal and overlay which included approx. 2,500 L.F. of new curb and gutter, sidewalk ramps to meet ADA requirements. In addition to the sidewalk ramps new sidewalks were also designed along a portion of the project which required the use of non-structural retaining walls due to elevation differences.

Brett Postl - Principal –In-Charge  
Luke Mattson - Project Manager and Bidding Support  
Dan Gillespie - Design, Surveying and Drafting  
Construction Estimate: \$1,200,000  
Completion Date: June 2007  
Project Contact: Scott A. Vasko, P.E. (630) 434-6804